

Sight glass valves

with male threaded connection

NORIS

Bauform 232

Application:

These glasses are suitable for screw in situations.
For example in tanks, pipes and vessels.
They are working with fluids also with gas.
Especially for one-off designs.

Operating conditions:

Working pressure : up to 40 bar
Working temperature: 150°C or 280°C

Installation:

Optional

Connections:

Male threaded: G (BSP)

Materials:


Body	Steel or Stainless steel
Glass	Borosilicate glass acc. to DIN 7080 Soda lime glass acc. to DIN 8902

Selection criteria:

Thread diameter
Working pressure
Working temperature
Body materials
Glass

Ordering example:

Sight flow valves Bauform 232
WN 1.4571
Borosilicate glass DIN 7080-16 bar
G 1"

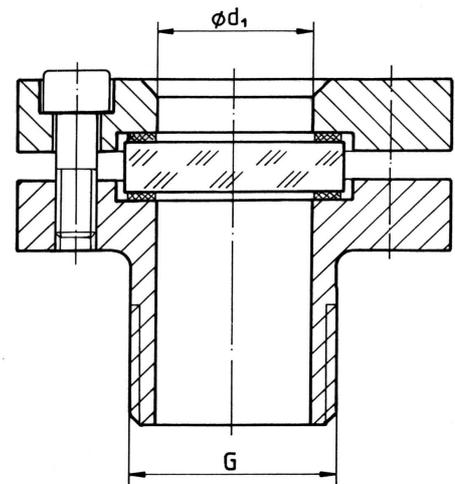

Modifications reserved

NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63
Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de
E-Mail: Noris@Noris-Armaturen.de