

Cap type strainer

NORIS

Bauform 148

Application:

Intermediate flange construction as starter strainer. Preferably installed in front of measuring instruments, control valves, pumps and sensitive systems.

Only by flange connection applicable

Operating conditions:

Nominal pressure: max. 16 bar

Installation:

Optional; between flanges

Options:


Special mesh sizes

Materials:

| | |
|---------------|-----------|
| Clamping ring | WN 1.4571 |
| Screen | WN 1.4401 |

Ordering example:

Cap type strainer, Bauform 148
Stainless steel; mesh size 1,0 mm
DN 50 PN 16

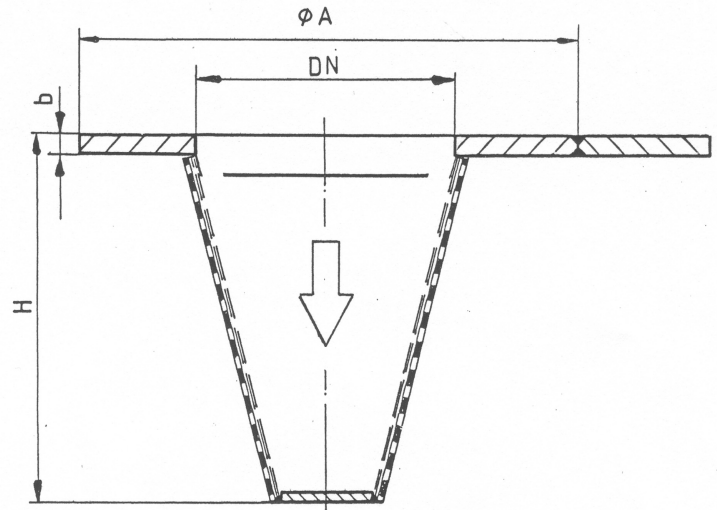

Dimension:

| DN | Ø A | H | b |
|-----|-----|-----|---|
| 25 | 68 | 40 | 3 |
| 32 | 78 | 45 | |
| 40 | 88 | 50 | |
| 50 | 102 | 80 | |
| 65 | 122 | 100 | |
| 80 | 138 | 115 | |
| 100 | 158 | 140 | |
| 125 | 188 | 165 | |
| 150 | 212 | 190 | |
| 200 | 268 | 255 | |
| 250 | 320 | 320 | |

Modification reserved

NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63
Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de
E-Mail: Noris@Noris-Armaturen.de