

EX-Light fittings

for Sight glasses in hazardous areas or safe areas

NORIS

Light fitting KEL

Application:

The light fittings to be used as a combination light and sight through a single glass port in hazardous/safe areas.

Mounting:

On circular sight glasses to DIN 28120, DIN 28121
On screwed sight glasses to DIN 11851
On sight flow indicators acc. to NORIS Bauform 880-887

Operating conditions:

To use independent of tank pressure.
In case of longer burning time, please pay attention to the warm up of the body.

Electrical Data:


Supply: AC or DC dependent upon type of light fittings
Voltage: 12 – 240 V
Rating: 5/10/20 or 50 (VA)

Mounting:

Mounting is made with the clamping screws which are part of the delivery. The necessary threads will be installed by NORIS.

Dimension:

Please ask for a special datasheet.

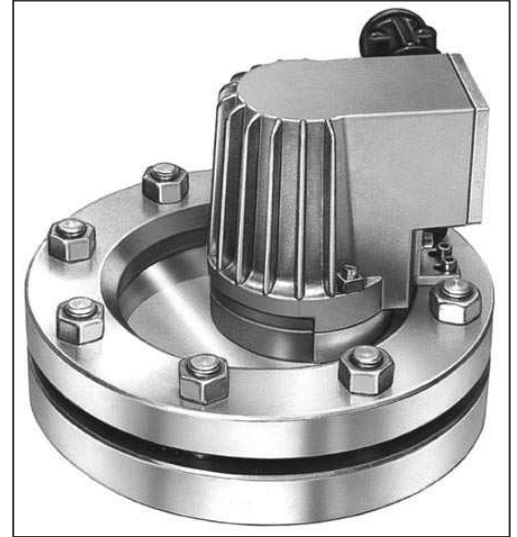

EX-light fitting KEL mounted on circular sight glass to DIN 28120



EX-light fitting KEL mounted on screwed sight glass similar to DIN 11851

Modification reserved

NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63
Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de
E-Mail: Noris@Noris-Armaturen.de