

Sight glass - Tubular type

with Safety Seal-System, acc. to DIN 28121

NORIS

Bauform 25

Application:

Sight glass - Tubular type with **DIN**-flanges on both sides, to use in either horizontal or vertical pipe lines for optical control of fluids and gasses.

Operating conditions:

Connection: Flanges PN 10/16
 Pressure: up to DN 100 - 6 bar max
 DN 125 and up – 4 bar max
 Temperature: 200°C max.

Installation:

Optional

Special designs:


Protection jacket of acrylic glass
 Flanges acc. to ANSI
 Extra length

Materials:


Flanges	WN 1.4571	Steel / H II
Distance-Bars	WN 1.4571	Steel
Screws	A4-70	Steel
Glass tube	Borosilicate glass (DURAN)	
Gaskets	PTFE covered	

Ordering example:

Sight Glass - Tubular Type Bauform 25
 WN 1.4571,
 Max. 6 bar / 200°C
 DN 50, PN 16

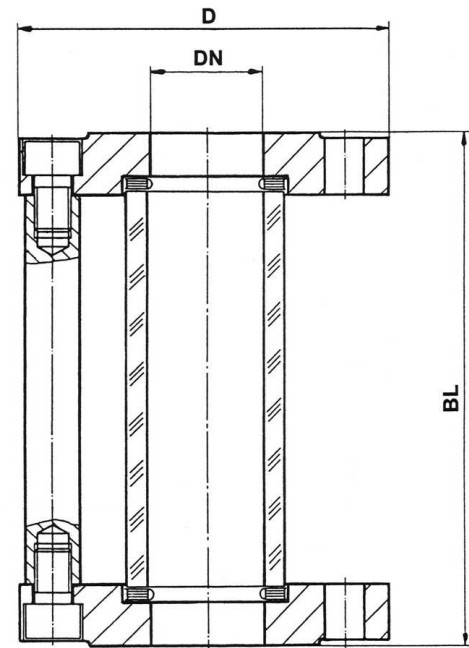

(Picture with acrylic-jacket)



Dimensions:

DN	D	BL
25	115	160
40	150	200
50	165	230
80	200	310
100	220	350
125	250	400
150	285	480

Mounting instructions:

Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.

Modification reserved

NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3
 D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63
 Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de
 E-Mail: Noris@Noris-Armaturen.de